

This discussion paper is/has been under review for the journal Atmospheric Measurement Techniques (AMT). Please refer to the corresponding final paper in AMT if available.

CIAO: the CNR-IMAA advanced observatory for atmospheric research

F. Madonna, A. Amodeo, A. Boselli, C. Cornacchia, G. D'Amico, A. Giunta, L. Mona, G. Pappalardo, and V. Cuomo

Consiglio Nazionale delle Ricerche – Istituto di Metodologie per l'Analisi Ambientale
CNR-IMAA, C. da S. Loja, Tito Scalo, Potenza, 85050, Italy

Received: 27 July 2010 – Accepted: 12 October 2010 – Published: 18 November 2010

Correspondence to: F. Madonna (madonna@imaa.cnr.it)

Published by Copernicus Publications on behalf of the European Geosciences Union.

AMTD

3, 5253–5293, 2010

**CIAO: the CNR-IMAA
advanced
observatory for
atmospheric research**

F. Madonna et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Abstract

The long-term observations of aerosol and clouds are of crucial importance to understand the weather climate system. At the Istituto di Metodologie per l'Analisi Ambientale of the Italian National Research Council (CNR-IMAA) an advanced atmospheric observatory, named CIAO, is operative. CIAO (CNR-IMAA Atmospheric Observatory) main scientific objective is the long-term measurement for the climatology of aerosol and cloud properties. Its equipment addresses the state-of-the-art for the ground-based remote sensing of aerosol, water vapour and clouds including active and passive sensors, like lidars, ceilometers, radiometers, a radar. This paper describes the CIAO infrastructure, its scientific activities as well as the observation strategy. The observation strategy is mainly organized in order to provide quality assured measurements for satellite validation and model evaluation and to fully exploit the synergy and integration of the active and passive sensors for the improvement of the atmospheric profiling. Data quality is ensured both by the application of protocols and dedicated quality assurance programmes mainly related to the projects and networks in which the infrastructure is involved. The paper also introduces examples of observations performed at CIAO and of the synergies and integration algorithms (using Raman lidar and microwave profiler data) developed and implemented at the observatory for the optimization and improvement of water vapour profiling. The CIAO database represents an optimal basis to study the synergy between different sensors and to investigate aerosol-clouds interactions, and can give a significant contribution to the validation programmes of the incoming new generation satellite missions.

AMTD

3, 5253–5293, 2010

CIAO: the CNR-IMAA advanced observatory for atmospheric research

F. Madonna et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



1 Introduction

Aerosol, water vapour and clouds as well as their reciprocal interactions play a crucial role as drivers of weather and climate system. Difficulties over their representation with sufficient accuracy within numerical models are responsible for most of the uncertainty of future global change and, therefore, there is a strong need for evaluating model capabilities to reproduce the behaviour of these key atmospheric parameters. The need for such observations has been also unambiguously asserted in the latest IPCC Fourth Assessment Report (IPCC, 2007), where it is remarked on as the primary importance of the knowledge of both the vertical dimension and the regional variability of atmospheric processes. As a consequence, the IPCC recommendations can be only fulfilled by performing long-term observations that must be range resolved, with high spatial and temporal resolution.

A complete evaluation of model performances also requires the availability of long-term ground-based measurements of all relevant atmospheric parameters. Satellite observations need ground-based measurements for calibration and validation (GCOS, 2006). Space-based observations present the advantage of providing global spatial coverage, but alone they do not allow for the studying of many atmospheric processes because of their insufficient temporal coverage. This concerns mainly the polar-orbiting satellites, whose revisit time is still an important issue to be investigated in order to understand the representativeness of these satellite observations (Pappalardo et al., 2010). Ground-based observations are also necessary for the long-term monitoring of atmospheric parameters that cannot be observed from available satellite-borne sensors.

The importance of long-term observations of aerosol and clouds is related not only to the evaluation and the improvement of model parameterization but also to the integration of models and observations using suitable assimilation schemes. In the last few years, modellers, that traditionally use standard measurements, like radiosoundings

AMTD

3, 5253–5293, 2010

**CIAO: the CNR-IMAA
advanced
observatory for
atmospheric research**

F. Madonna et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



profiles, surface or columnar parameters for constraining model forecasts and analysis, are progressively increasing the number and the type of routine and systematic ground-based observations that are assimilated in their numerical prediction models.

The detailed knowledge of optical, microphysical and radiative properties of aerosol and clouds is essential in understanding their role in atmospheric processes as well as their impact on human health and environment. Despite the considerable improvements made in the observation capability for aerosol and cloud characterisation in the last decade, our knowledge is still limited.

To fill the existing gaps, the international scientific community is promoting the establishment of integrated global observing systems including ground-based, airborne in situ measurements and space-borne observations in combination with advanced modelling. GEOSS architecture integrates environmental observations, monitoring data and measurements with modelling to support and inform environmental decision-makers (<http://www.epa.gov/geoss/>). This strategy is based on the necessity for sustainable long-term ground-based observations (WMO, 2005).

In this scenario, existing ground-based atmospheric advanced observatories like, for example, those established in the frame of the ARM programme in the USA (Stokes and Schwartz, 1994; <http://www.arm.gov>), or CESAR at Cabauw in the Netherlands (Russchenberg et al., 2005; www.cesar-observatory.nl) play an important role. These ground-based anchor stations are equipped with state-of-art techniques and instruments and they are able to provide traceable observations and advanced/integrated products for climate and weather studies. In particular, these advanced products with high resolution and accuracy are strongly needed for the validation of new generation satellite missions, based on multi-purpose platforms equipped with different active and passive sensors.

CIAO, the CNR-IMAA atmospheric observatory, located in Southern Italy, operates in this scientific context in synergy with most of the European atmospheric observatories. In this paper, a description of the CIAO infrastructure and of its scientific objectives is given. The experimental field, the expertise and the observing strategy are

AMTD

3, 5253–5293, 2010

**CIAO: the CNR-IMAA
advanced
observatory for
atmospheric research**

F. Madonna et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

presented in Sect. 2. In Sect. 3, the database, products and integration strategy are briefly described. In Sect. 4, examples of the observations performed and of synergy and integration techniques developed and implemented at the observatory are shown. Since it is difficult to provide a comprehensive example of all the activities ongoing at CIAO, we will focus on water vapour measurements.

2 The CNR-IMAA Atmospheric Observatory (CIAO)

CIAO is one of the most advanced infrastructure for ground-based remote sensing in Europe. It is located in Tito Scalco, Potenza, Southern Italy, on the Apennine mountains (40.60° N, 15.72° E, 760 m a.s.l.), less than 150 km from the West, South and East coasts (Fig. 1). The site is in a plain surrounded by low mountains (< 1100 m a.s.l.). The observatory operates in a typical mountain weather strongly influenced by Mediterranean atmospheric circulation, resulting in generally dry, hot summers and cold winters. In this location phenomena-like orographically-induced effects on cloud formation can be studied. The site is particularly interesting for studying aerosol properties because it is affected by quite a large number of Saharan dust intrusions per year (Mona et al., 2006) and it is located 300 km away from the Etna Volcano (Pappalardo et al., 2004a). Moreover, the availability of simultaneous measurements of aerosol and cloud properties makes the site optimal also for the investigation of aerosol-cloud interactions.

CIAO is run by the Istituto di Metodologie per l'Analisi Ambientale (IMAA) of the Italian National Research Council (CNR). At present, the observatory performs systematic aerosol measurements in the frame of EARLINET (European Aerosol Research Lidar NETwork; <http://www.earlinet.org>) and continuous aerosol measurements in the frame of AERONET (Aerosol RObotic NETwork; <http://aeronet.gsfc.nasa.org>). The CIAO infrastructure hosted international satellite validation experiments for the study of water vapour (e.g. EAQUATE; Taylor et al., 2008), it has been involved in several international experiments for the study of clouds and its modelling, and strongly cooperates with the

AMTD

3, 5253–5293, 2010

CIAO: the CNR-IMAA advanced observatory for atmospheric research

F. Madonna et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Cloudnet (www.cloud-net.org). Moreover, since December 2009, CIAO is among the twelve backbone stations involved in the operations of GRUAN (GCOS Upper-Air Reference Network; www.gruan.org).

At CIAO, much attention has been traditionally paid to the study of aerosol and water vapour using lidar techniques (Pappalardo et al., 2004a,b, 2010; Mona et al., 2006, 2007, 2009). However, since 2004 the facility strengthened its observing capability for the monitoring of clouds through the acquisition of new active and passive microwave profilers, with the main objective to investigate aerosol-cloud interactions using both active and passive remote-sensing techniques. The wide range of measurements provided at the facility makes it an ideal site for calibration, validation and intercomparison campaigns.

All the observations performed at CIAO are designed in order to be redundant, traceable and to follow the main international standards, provided by the WMO and other research programmes.

The main research lines currently active at CIAO include:

- a. design and implementation of lidar systems for aerosol, water vapour and cloud measurements;
- b. development of algorithms for the integration of lidar and microwave radiometer measurements;
- c. definition of measurement protocols, quality assurance programmes and data managing strategies;
- d. definition of a suitable strategy for the satellite CAL/VAL;
- e. analysis of the physical and dynamical processes related to aerosol transport, their modification and classification;
- f. analysis and physical interpretation of observations provided by both active and passive sensors for the study of aerosol and cloud interactions and nucleation processes;

AMTD

3, 5253–5293, 2010

**CIAO: the CNR-IMAA
advanced
observatory for
atmospheric research**

F. Madonna et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- g. organization and participation in measurement campaigns;
- h. development of methods for the evaluation of aerosol transport and mesoscale weather prediction models;
- i. networking.

5 So far, CIAO is also strongly operating in order to provide quality-controlled vertical profiles of clouds, humidity, temperature and aerosols. The quality assurance has been established mainly according to the EARLINET measurement protocol that aims at the establishment of a long-term statistically significant database of aerosol measurements for climatologic studies (Matthias et al., 2004). Data quality also matches the protocols
 10 developed in the frame of the international networks in which the other active and passive instruments are operational.

Another key issue related to the data quality is represented by the instrument inter-comparison: this concerns both the comparison among different techniques measuring the same atmospheric key variables, routinely performed at CIAO for obtaining redundancy analysis, and the comparison among instruments of the same type, such as
 15 the EARLINET lidar intercomparison campaigns (SLiCE2000 and EARLI-09; Matthias et al., 2004; Freudenthaler et al., 2010) or the radiometer intercomparison during the preparation phase of LAUNCH-2005 (Madonna et al., 2006).

The intensive exchange of expertise within EARLINET and with the main Euro-
 20 pean atmospheric observatories (e.g. Lindenberg, Cabauw, Chilbolton, Sodankyla) as well as the participation to GAW-GALION (Global Atmospheric Watch – Aerosol Lidar Observation Network – WMO, 2007) and the contribution to the WMO Sand and Dust Storm Warning System (SDSWS; http://www.wmo.int/pages/prog/arep/wwrp/new/documents/SDS_WAS_draft_implementation_plan.pdf), in the frame of the World
 25 Weather research programme, ensure a strong link with international programmes and organizations and, therefore, the development of CIAO research activities in agreement with the main international standards.

**CIAO: the CNR-IMAA
advanced
observatory for
atmospheric research**

F. Madonna et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Finally, CIAO offers support to the activities of the local government, decision-makers, environmental agencies and the Italian Protection Agency.

In the following paragraphs, the CIAO equipment for ground-based observations of the atmosphere is described.

2.1 Lidars

Since 1993, lidar remote sensing of the atmosphere is one of the main research activities carried out at CNR-IMAA. Currently, three lidar systems are operative at CIAO, devoted to the study of aerosol, water vapour and clouds. All these lidar systems are designed and implemented within the Institute.

The multi-wavelength lidar system for tropospheric aerosol characterisation, PEARL (Potenza EARlinet Raman Lidar), operating at CNR-IMAA since August 2005 (Mona et al., 2006, 2009) has been designed in order to provide simultaneous multi-wavelength aerosol measurements for the retrieval of optical and microphysical properties of the atmospheric particles (Ackermann et al., 1998; Müller et al., 2001) and water vapour mixing ratio profiles. This system is the result of the upgrade of a preexistent lidar system, operative since May 2000 in the frame of EARLINET (Bösenberg et al., 2001). The system is based on a 50 Hz Nd:YAG laser source emitting at 1064 nm and equipped with the second and third harmonic generators. An optical system based on mirrors, dichroic mirrors and 2X beam expanders, separates the three wavelengths allowing to optimize the energy and the divergence for each wavelength. The beams are mixed again in order to get the collinearity of the three wavelengths and to transmit them simultaneously and coaxially with respect to the lidar receiver. The backscattered radiation from the atmosphere is collected by a F/10 Cassegrain telescope (0.5 m diameter, 5 m focal length) and forwarded to the receiving system, equipped with 16 optical channels. Three channels are devoted in detecting the radiation elastically backscattered from the atmosphere at the three laser wavelengths (355 nm, 532 nm and 1064 nm); three channels for the Raman radiation backscattered from the

CIAO: the CNR-IMAA advanced observatory for atmospheric research

F. Madonna et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



atmospheric N_2 molecules at 387 nm and 607 nm and H_2O molecules at 407 nm. Two further channels detect the polarized components of the 532 nm backscattered light (perpendicular and parallel respect to the direction of the linearly polarized beam transmitted by the laser at 532 nm). Each of these channels is further split in two channels differently attenuated for the simultaneous detection of the radiation backscattered from the low and high altitude ranges in order to extend and optimize the dynamic range. The spectral selection of the collected radiation is performed by means of dichroic mirrors and interferential filters. Interferential filter bandwidths is 0.5 nm at all the wavelengths for both nighttime and daytime operations. For the elastic backscattered radiation at 1064 nm the detection is performed by using an APD detector and the acquisition is performed in analog mode. For all the other acquisition channels, the detection is performed by means of photomultipliers and the acquisition is in photon-counting mode. PEARL performs systematic measurements three times per week in the frame of EARLINET (Pappalardo et al., 2010), and during international experiments or special atmospheric events (saharan dust outbreaks, volcanic eruptions, etc.). The vertical resolution of the raw profiles is 7.5 m for 1064 nm and 15 m for the other wavelengths, whereas the temporal resolution is 1 min.

The IMAA Raman lidar system (Mona et al., 2007) for water vapour measurements has been operational at CNR-IMAA since July 2002. It performs measurements simultaneously with PEARL. This system is based on a Nd:YAG laser with a repetition rate up to 100 Hz and typically operating at 50 Hz. Radiation at 355 nm is transmitted into the atmosphere coaxially with respect to a F/10 Cassegrain telescope used as a receiver. The telescope is of the same type as PEARL. The backscattered radiation is selected by means of dichroic mirrors and interferential filters and then is split into three channels, corresponding to the elastic backscattered radiation at 355 nm, the N₂ Raman shifted signal at 386.7 nm and the water vapour Raman shifted signal at 407 nm. Interferential filter bandwidths are kept below 1.0 nm and 0.3 nm for nighttime and daytime operations, respectively, thus, reducing the solar background during daytime measurements and limiting the effects of both atmospheric temperature variations

**CIAO: the CNR-IMAA
advanced
observatory for
atmospheric research**

F. Madonna et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



[Back](#)

Close

Full Screen / Esc

[Printer-friendly Version](#)

Interactive Discussion



on the measured signals (Behrendt et al., 2002) and interferences from liquid water Raman scattering (Whiteman et al., 2001). As for PEARL, the spectrally selected radiation is then split for each wavelength into two channels in order to preserve the linearity of the lidar signals over all altitude ranges. Photomultiplier tubes are used as detectors and both low and high range signals are acquired in photon counting mode. The typical vertical resolution of the raw profiles is 15 m with a temporal resolution of 1 min.

MUSA (Multiwavelength System for Aerosol) is a mobile multi-wavelength lidar system based on a Nd:YAG laser equipped with second and third harmonic generators and on a Cassegrain telescope with a primary mirror of 300 mm diameter. The three laser beams at 1064, 532 and 355 nm are simultaneously and coaxially transmitted into the atmosphere in bistatic configuration. The receiving system has 3 channels for the detection of the radiation elastically backscattered from the atmosphere and 2 channels for the detection of the Raman radiation backscattered by the atmospheric N₂ molecules at 607 and 387 nm. The elastic channel at 532 nm is split into parallel and perpendicular polarization components by means of a polarizer beamsplitter cube. The backscattered radiation at all the wavelengths is acquired both in analog and photon counting mode. For MUSA the calibration of depolarization channels is made automatically using the $\pm 45^\circ$ method (Freudenthaler et al., 2009). The typical vertical resolution of the raw profiles is 3.75 m with a temporal resolution of 1 min. The system is compact and transportable. It has been developed in cooperation with the Meteorological Institute of the Ludwig-Maximilians-Universität of Munich and it is one of the reference systems used in the frame of the EARLINET Quality Assurance programme.

Both the multiwavelength lidars allow independent measurements of the aerosol extinction and backscatter coefficients and, therefore, of the lidar ratio at 532 nm and 355 nm (Ansmann et al., 1990; Pappalardo et al., 2004b). An iterative approach (Di Girolamo et al., 1995) is used for retrieving the aerosol backscatter coefficient at 1064 nm from the elastically backscattered lidar signal only. The aerosol linear depolarization ratio measurements are obtained according to Freudenthaler et al. (2009).

**CIAO: the CNR-IMAA
advanced
observatory for
atmospheric research**

F. Madonna et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

The water vapour Raman lidar provides measurements of the water vapour mixing ratio profile (Mona et al., 2007) as well as independent measurements of the aerosol extinction and backscatter coefficients at 355 nm.

2.2 Microwave profilers

- 5 A ground-based microwave profiler (MP3014), designed by Radiometrics Corporation (Ware et al., 2003), has been operational at CIAO since February 2004. It measures the sky brightness temperature (T_b) at 12 frequencies: 5 in the K-band, distributed from the centre onto the wing of the 22 GHz water vapour resonance absorption line, the rest are in the V-band, distributed on one shoulder of the 60 GHz oxygen spin-rotation band.
- 10 The radiometer is equipped with an infrared thermometer (IRT), installed on the top of the radiometer cabinet, able to measure zenith sky brightness temperature (T_b) within the spectral range of 9.6 to 11.5 μm , and with surface meteorological sensors, used as constraints in the retrieval algorithm. The microwave profiler is also able to perform a 3-D scanning of the atmosphere, though the measurements, showed in the following, are referred to T_b values obtained by only viewing the zenith direction. The microwave profiler is also equipped with a rain effect mitigation system able to minimize error resulting from the accumulation of liquid water and ice on the microwave radiometer radome.
- 15

- The T_b inversion provides temperature, humidity and cloud liquid water profiles up to 10 km above the ground station. Additionally, the inversion also provides an estimation of the Integrated Precipitable Water Vapour (IPWV) and of the cloud Integrated Liquid Water content (ILW). The uncertainty of the IPWV and ILW are calculated according to Cadeddu et al. (2009). The sky brightness temperatures are inverted using a neural network algorithm (Solheim et al., 1998) trained on about 10 000 radiosounding profiles. Vertical profiles are output in 100 m up to 1 km and 250 m from 1 to 10 km, with a minimum temporal resolution of 12 s.
- 20
- 25

In March 2009, a meteorological Ka-Band cloud radar (MIRA36), designed by METEK GmbH, was installed at CIAO. It is a mono static magnetron based pulsed

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



CIAO: the CNR-IMAA advanced observatory for atmospheric research

F. Madonna et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Ka-Band Doppler radar for unattended long-term observation of cloud properties. In the configuration operative at CIAO, linear polarized signal is transmitted while co- and cross-polarized signals are received simultaneously to detect Doppler spectra of the reflectivity and Linear Depolarization Ratio (LDR). The reflectivity is used to determine the density of cloud constituents while LDR helps to identify the target type. The radar has a 1.2 m diameter antenna and emits the microwave radiation at 35.5 GHz with a peak power of 30 kW, a pulse width of 200 ns and a pulse repetition rate of 5 KHz. The antenna beam width is $0.6^\circ \times 0.6^\circ$ (gain 49 dBi) and the radar sensitivity is -40.3 dBZ at 5 km (0.1 s time resolution) while the Doppler velocity resolution is 0.02 m/s. The receiver calibration is within an accuracy of less than ± 1 dB. This system is able to provide high accurate measurements of the reflectivity factor with a vertical resolution up to 15 m, though the current configuration is set to a vertical resolution of 30 m. The system is also equipped with a clutter fence that strongly suppresses the ground clutter echo. Before the end of 2010, the radar will also be equipped with a 3-D scanning unit and with a larger antenna (2 m diameter), becoming the first radar system in Europe working in the Ka-band with the possibility of performing a $\pm 90^\circ$ scanning of the atmosphere.

2.3 Ceilometers

Among the active remote-sensing devices, two laser ceilometers are also operational at CIAO. Since August 2004, CT25K ceilometer type manufactured by VAISALA, continuously measures the cloud-base height and the signals backscattered by atmospheric particles. The ceilometer is basically a Rayleigh lidar system that employs a pulsed In-Ga-As diode laser emitting at 905 nm wavelength using a high repetition rate (1.6 μ J of energy per pulse at 6.67 kHz) and detects the elastic backscattered radiation. CT25K ceilometer is able to detect three cloud layers simultaneously to identify precipitation or other obstructions to vision. Besides cloud layers, it also provides the profile of an uncalibrated backscattering coefficient at 905 nm up to 7.5 km with a vertical resolution of 30 m and a temporal resolution of 15 s.

Since September 2009, a second ceilometer for cloud base measurements, CHM15k type manufactured by Jenoptik Laser Optik Systeme, has been in operation at CIAO. It is able to measure the cloud base height of cloud layers up to 15 km above the ground with the possibility in investigating the optical properties of cirrus clouds up to the tropopause. CHM15k employs a Nd:YAG pumped diode laser emitting at 1064 nm wavelength using a high repetition rate (8 μ J of energy per pulse at 5.58 kHz) and it is equipped with a photon counting acquisition system. As for the CT25K ceilometer, it is able to detect three cloud layers simultaneously, but it also provides the retrieval of the boundary layer height and the cloud penetration depth. The 1064 nm raw signal has a vertical resolution of 15 m and a temporal resolution of 30 s.

2.4 Other passive systems

CIAO is also equipped with a CIMEL CE-318 sun photometer for measuring atmospheric aerosol columnar properties. This is a multi-channel, automatic sun-and-sky scanning radiometer that measures the direct solar irradiance and sky radiance at the Earth's surface. It is operative within AERONET and it provides the aerosol optical depth (AOD) at 340, 380, 440, 500, 675, 870, 1020 and 1640 nm (Holben et al., 2001), along with the water vapour column content and the estimation of several optical and microphysical aerosol properties, such as the refractive index and the size distribution. The system is fully automatic and powered using solar panels. The measured radiances are automatically sent to the NASA-GSFC where they are processed according to the AERONET data analysis. A cloud mask is also applied to remove cloud contamination. The system is calibrated, on average, once per year and after the calibration procedure the lv2.0 quality assured data are released on the AERONET website. Since June 2010, CIAO sun photometer is also running using the new AERONET "cloud mode" capability with the aim to improve cloud optical depth observations (Chiu et al., 2010).

CIAO interest in sun photometer measurements is also related to the synergy with aerosol lidar measurements. Actually, the combination of multi-wavelength lidar

AMTD

3, 5253–5293, 2010

**CIAO: the CNR-IMAA
advanced
observatory for
atmospheric research**

F. Madonna et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



profiling measurements with the columnar aerosol optical depths provided by the sun photometer allows us to improve the accuracy of the retrieval of aerosol microphysical properties (Müller et al., 2006).

CIAO also operates an automatic station equipped with high class broad band radiometers. A solar tracker automatically manages the position of the operating sensors in compliance with the sun position. The station includes two-shaded pyranometers (0.2–3.6 μm) and a shaded pyrgeometer (4.5–42 μm) deployed for measuring the downwelling diffuse solar radiation scattered by the atmosphere and the downwelling infrared radiation incident at the surface, respectively. Furthermore, the pyreliometer measures direct or un-scattered solar radiation (0.2–4.0 μm). The measured solar and longwave irradiances can be suitably processed to retrieve the shortwave and long-wave clear sky fluxes.

A Trimble GPS antenna/receiver station is already operative, even if its use for providing the integrated water vapour estimation will start by the end of 2010.

2.5 In situ measurements

Balloon-based observations of temperature, pressure, humidity and winds are performed at CIAO using three different radiosounding systems: the VAISALA AS13 autsonde system and two manual VAISALA radiosouding systems (MW21 and PP15). The automatic radiosounding station is able to perform up to 24 radiosoundings automatically and remotely controlled. Moreover, the system is also scheduled for activating up to two spare radiosoundings in order to prevent any faults in the launch procedure. GPS radar height on balloons is also available for the AS13 and MW21 systems allowing for the retrieval of the vertical profile of wind direction and speed. MW21 is also able to manage the data received from the ozonesonde digital interface for measurements of the ozone mixing ratio vertical profile up to about 40 km a.g.l. All the systems are periodically upgraded and recalibrated by the manufacturer.

CIAO radiosouding database consists of routine launches performed simultaneously to the water vapour Raman lidar systematic nighttime measurements and of intensive

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



radiosounding samplings (up to 5–6 launches per day) carried out in the frame of international measurements campaigns. Radiosounding launches are currently performed using RS92-SGP, whereas in the past RS-80 and RS-90 sondes have been used. Comparison of different radiosonde types have been performed both to assess possible biases in the collected database and to ensure a proper management of the device change. Examples of these comparisons are provided in Sect. 4.1.

Since the beginning of 2010, according to a preliminary protocol established in the frame of GRUAN, CIAO is performing one weekly RS92-SGP launch using the autosonde launcher. Moreover, it is going in the next future to perform a monthly stratospheric water vapour launch, simultaneously to the weekly autosonde launch, using the RDD-100 prototype sondes (<http://www.vaisala.com/weather/applications/referenceradiosondeprogram.html>).

Standard surface variables (pressure, temperature, humidity and wind) are routinely monitored using the VAISALA MILOS520 Automatic Weather Station, with a typical temporal resolution of 1 min. The station is also equipped with additional sensors for the measurements of present weather, visibility and rain gauge.

3 Products, database and integration strategy

Table 1 reports the list of all the instruments operative at CIAO. For each of them, the level 1 (lv1) and level 2 (lv2) products they provide and the retrieval algorithms currently in use for the lv2 data processing are included. According to the architecture of the CIAO database, level 0 data (lv0) are represented by the raw measurements output of each instrument (e.g. the number of photons collected by the lidar or the voltages measured by the microwave profiler). The lv1 products are referred to the “raw products”, for example the lidar range-corrected signals or the microwave brightness temperatures. The lv2 products indicate the estimation of atmospheric parameters retrieved from the application of suitable algorithms to the lv1 products, like the lidar water vapour mixing ratio or the microwave temperature profile. In Table 1, the quality

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



assurance programme/protocol used for the provision of the final (quality assured) data is also reported to the CIAO database. Finally, the list of the advanced products obtained from the integration of the data provided by different instruments is reported.

The CIAO database is organized in order to collect both the raw data (lv0, lv1) and the final quality assured products (lv2). All the data are archived in NetCDF format and each file contains all the necessary information for its use in evaluation/validation procedures as well as to reprocess the data in case of the availability of new calibration or retrieval schemes. Before archiving, all the data also undergo the quality assurance protocols reported in Table 1.

The database is accessible through the CIAO website (www.imaa.cnr.it) behind a request to the instrument PI. Each instrument PI is also in charge of both checking the status of maintenance procedures and supporting the users. The database and most of the real-time quicklooks of the collected data are also accessible from the websites of the networks in which the CNR-IMAA is involved.

In order to fully exploit the simultaneous use of different ground-based remote-sensing techniques, a suitable integration strategy has been adopted at CIAO. The strategy is based on two main points: redundancy and complementarity. Redundancy is necessary to collect a large dataset of observations for comparisons, intercalibrations and cross checks of the retrieved parameters, also improving the measurement traceability; complementarity is important in order to override the intrinsic limits of each single observation technique, to reduce measurement uncertainty and to extend the sounding vertical range covering nearly all weather conditions. This strategy also includes the design and the implementation phases of the instruments and the elaboration of suitable retrieval algorithms for the integration of active and passive observations. The development of integration algorithms also enhances the capability of evaluating the performances of model outputs and satellite retrievals and of identifying possible discrepancies and spurious trends.

**CIAO: the CNR-IMAA
advanced
observatory for
atmospheric research**

F. Madonna et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏮

⏭

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



4 Water vapour measurements

In this section, a sample of the observation performed at CIAO and of the synergies and integration algorithms elaborated and currently in use is presented. The large number of instruments available and products released at the observatory makes it difficult for the provision of a comprehensive example of all the observations currently performed at the observatory. In the following, we will focus on the optimization and improvement of water vapour profiling using observations collected with radiosondes, Raman lidar and microwave profiler as well as on the integration of Raman lidar and microwave profiler measurements.

Water vapour and cloud measurements still represent a crucial issue in the atmospheric studies. Tropospheric water vapour and its content in clouds is a fundamental variable for understanding the physical processes occurring within clouds, the radiative forcing due to clouds and water vapour and their feedback processes, are one of the main uncertainties towards an accurate evaluation of Earth's radiative budget (IPCC, 2007). Furthermore, satellite and model validation needs improved accuracy and a long-term database of high-resolution measurements. Actually, the modelling community clearly shows a strong interest in the water vapour profiling measurements because of its high variability that makes it necessary for a long-term comparison between accurate high resolution observations and the forecast/analysis of operational mesoscale models. The large dataset collected at CIAO is a good opportunity to perform a climatologic study of water vapour, particularly in the boundary layer where both aerosol and water vapour contents are higher and more variable, to study cloud formation, to evaluate the model capability to capture mean aspects of the water vapour field and to improve model parameterizations. In the following paragraph, examples of water vapour measurements performed at CIAO using radiosoundings, Raman lidar and microwave profiler are provided. Two examples of the possible synergies and integrations between active and passive techniques are also described. These examples are fully oriented to the optimization of water vapour ground-based profiling during

AMTD

3, 5253–5293, 2010

**CIAO: the CNR-IMAA
advanced
observatory for
atmospheric research**

F. Madonna et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

cloudy conditions. Particularly described is the procedure for the calibration of the water vapour mixing ratio profile obtained from the Raman lidar using the estimation of the IPWV retrieved by a microwave profiler. Moreover, an integration retrieval scheme for the profiling of water vapour through the integration of Raman lidar and microwave measurements, based on the use of the Kalman filter, is described and discussed.

4.1 Radiosoundings

Radiosounding launches are performed at CIAO with the purposes both to investigate the atmospheric parameters using in situ measurements and to provide reference measurements for the calibration of Raman lidar profiles (described in the following section).

As mentioned in Sect. 2.5, the availability of three radiosounding systems allows us to perform dual launches for intercomparing different radiosonde types and different receiving stations. CIAO archive contains either several examples of dual sonde launches performed using the manual and the automatic launch systems or co-located and simultaneous radiosoundings and remote sensing profiling measurements, in particular using the Raman lidar and the microwave profiler. This redundant dataset is the basis for performing redundant analysis in order to assess and reduce measurements uncertainties. In particular, studies for evaluating radiosounding representativeness, estimating its impact on the uncertainty of the measured parameters and addressing instrument co-location issues are in progress.

Several multiple balloon launches using different radiosonde types (RS-80, RS-90 and RS-92) have been performed to assess and diagnose instrument failure and characterise instrument biases like the RS80 sonde dry-bias problem (Turner et al., 2003), also taking advantage of the availability of multiple stations. In Fig. 2, two examples of dual launches performed at CIAO are shown. In Fig. 2a and b, temperature and humidity profiles collected using co-located and simultaneous RS92-SGP and RS92-KL sondes, launched using the manual procedure and the autosonde launcher, respectively, are compared. The distance between the two systems is about 50 m and the

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[⏮](#)
[⏭](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)


average start time difference between the two launches is within 10 s. The example reported shows the typical good agreement between the temperature profiles with differences in the stratosphere due to small scale fluctuations of the temperature field (Lilly et al., 1974). The comparison between the RH profiles, instead, shows differences lower than 5% up to 14 km above the station, and less than 10% above. In both the considered regions, the differences are mainly due to the distance gained by the sondes during the flight and the strong variability of water vapour field.

In Fig. 2c and d, temperature and humidity profiles measured using RS80 and RS92-SGP sondes are compared. This comparison aimed at evaluating the problems of RS80 sonde dry-bias (Turner et al., 2003). Plot in Fig. 2d also includes the RS80 humidity profile corrected for the dry-bias problem according to the Leiterer method (Leiterer et al., 1997). An optimal agreement is observed between the temperature profiles. The comparison of the relative humidity profiles, instead, shows a significant difference between the RS-92 and RS-80 profile in the region located from 8.6 to 15.7 km a.g.l. and, at the same time, the good performance of Leiterer correction in reducing the dry-bias affecting RS-80 in this region. The difference between the RS-92 and RS-80 RH profiles is reduced on average from less than 10% to less than 1% up to 12.5 km above the ground in the dry-bias region.

The database of dual launches flying different radiosounding types also ensures a consistent use of the data collected with different sensors providing essential information for the management of change of radiosounding type.

4.2 Water vapour Raman lidar

Raman lidar profiling is one of the most powerful techniques for the study of atmospheric water vapour distribution due to its capability to provide high resolution measurements both in space and time. Raman lidar profiling is a well-established technique even if there are still some crucial issues that need to be better addressed; the main ones of which are related to the lidar system calibration (Sherlock et al., 1999; Whiteman et al., 2001), the overlap function (Wandinger et al., 2002; Whiteman et al.,

2006), the temperature sensitivity of the Raman backscattering spectrum (Whiteman et al., 2003a), and the correction for the aerosol extinction contribution (Whiteman et al., 2003b).

Water vapour Raman lidar observations at CIAO are systematically evaluated considering all these different aspects. In this section, the procedure for the calibration of the water vapour Raman profiles using the IPWV retrieved using the microwave profiler is described.

So far, water vapour Raman lidar profiles are calibrated using either absolute or relative calibration methods. According to the comparisons reported in literature, higher performances are granted to the relative methods. The accuracy of a relative calibration method can stay within 5% while the accuracy of the absolute calibration is within 10% (Whiteman et al., 2001). The traditional strategy adopted at CIAO for the calibration of water vapour Raman lidar profiles is based on the determination of the calibration constant by comparing the simultaneous and co-located radiosounding profiles. The calibration constant of the Raman lidar system has first been determined during a calibration campaign (May–June 2002), resulting stable within 5% (Mona et al., 2007), and re-evaluated after a system change in November 2008. About 200 radiosonde launches in May 2002–June 2006 period have been used for systematically checking the stability of the calibration constant. The uncertainty on the calibration constant using radiosondes is typically within 5% (Cornacchia et al., 2004).

Nevertheless, since 2004 IPWV microwave retrievals have been used for monitoring the stability of the calibration not only among measurements of different days, but also within each daily time series increasing the accuracy and physical consistency of the derived profiles as well as highlighting possible dependencies on the stability of the lidar system. The application of this approach is limited to nighttime measurements, even though a qualitative comparison can also be operated during daytime.

In order to use the IPWV microwave retrieval for calibration purposes, a few assumptions are necessary since the lidar profiles cover nearly the full troposphere but not the entire investigated atmospheric column. These assumptions are related to the

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



**CIAO: the CNR-IMAA
advanced
observatory for
atmospheric research**

F. Madonna et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



system overlap function problems and to the signal-to-noise of the lidar signals in the upper troposphere/lower stratosphere region. The first problem is related to the fact that a lidar system is not an “ideal” system and the overlap functions of the 407 nm and 387 nm optical channels used for the retrieval of water vapour mixing ratio profile may be different (Whiteman et al., 2001). Lidar water vapour profiles need to be corrected for this effect. Overlap correction is usually determined by a comparison with an ensemble of RS92-SGP radiosondes (Whiteman et al., 2006). CIAO water vapour lidar provides accurate measurements starting from 150–300 m a.g.l. after the application of the overlap correction. An assumption about the water content between this altitude and the ground is required to calibrate the lidar profiles using the microwave IPWV. In our case, we assume that in this atmospheric range (0–300 m) the water vapour mixing ratio is linearly distributed between the surface mixing ratio value, measured by a standard meteorological station, and the first available lidar data point. Excluding a very strong inversion at the ground, this approximation can be considered accurate enough, since the atmospheric range between 0 and 300 m is well mixed both during nighttime and daytime (Stull, 1988).

Raman lidar is also able to measure the tropospheric water vapour up to a maximum range depending on the measurement conditions, the time and the vertical resolutions. This means that, in order to calibrate the lidar profile with the radiometric IPWV, an accurate estimation of the water vapour mixing ratio profile above the maximum height available from lidar profiles is needed. The use of nearest radiosounding, in time and space (co-located or from the radiosounding station of Brindisi Casale), or the use of a climatologic profile from the co-located radiosounding dataset can supply this request. Depending on the measurement conditions, water vapour Raman lidar profiles are retrieved up to 8–10 km a.g.l. over a temporal resolution 10 min.

In Fig. 3, a case study is reported relative to the observations of the water vapour mixing ratio profiles performed with the Raman lidar and the microwave profiler at CIAO in the frame of EAQUATE campaign during the period from 17:50 to 23:20 UT on 8 September 2004. In particular, the comparison between the radiometric IPWV

**CIAO: the CNR-IMAA
advanced
observatory for
atmospheric research**

F. Madonna et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



1997). Each of these measurement techniques has strengths and weaknesses. Actually, the Raman lidar technique is able to provide high-resolution water vapour measurements in time and space: this compensates for the coarse vertical resolution of the profiles provided by the passive microwave retrievals. On the other hand, microwave profilers are able to operate in nearly all-weather conditions with a high temporal resolution: this compensates for the limitation of the Raman lidar measurements performed during daytime or in the presence of low-clouds. Therefore, the development of suitable retrieval algorithms that integrate lidar and microwave measurements is a right way to improve the profiling of atmospheric water vapour.

Here, we introduce a retrieval scheme for the profiling of water vapour through the integration of Raman lidar and microwave measurements based on the use of the Kalman filter. The main goal of this integration approach is to provide an accurate estimation of the vertical profile of water vapour mixing ratio in the region extending from the ground to 10 km a.g.l. in the presence of thick clouds or during daytime observations.

Kalman filter is a sequential filter method and constitutes an attractive option for the integration of measurements provided by different applications (Kalman et al., 1960). Kalman scheme basically moves from using two equation groups. The first group (Eqs. 1 and 2), so-called “time update”, projects the state variable x (in our case, the water vapour mixing ratio profile) forward in time from the time step $i-1$ to the time step i :

$$x_i^b = \mathbf{A} x_{i-1} + \mathbf{w}_{i-1} \quad (1)$$

$$\mathbf{P}_i^b = \mathbf{A} \mathbf{P}_{i-1} \mathbf{A}^T + \mathbf{Q}_{i-1} \quad (2)$$

\mathbf{A} is the transition matrix connecting the previous state vector at the time step $i-1$ to the background vector x_i^b at the time step i . Here \mathbf{A} is an identity matrix. The vector \mathbf{w} is the transition error calculated using long time series of lidar data according to the approach proposed by Han et al. (1997), but averaged on 1 h integration time to reduce

the transition error at the upper levels. \mathbf{P} and \mathbf{P}^b indicate error covariance matrices of the state and the background vectors, respectively. Here they are the estimation of the water vapour mixing ratio profile and the profile obtained from Eq. (1). Finally, \mathbf{Q} is the covariance matrices of \mathbf{w} , assumed as white Gaussian noise processes with zero-mean.

The second equation group (Eqs. 3–5) is devoted to the correction of the background estimation \mathbf{x}_i^b (i.e. the forecast) by assimilating the experimental measurement to get an improved a posteriori estimate:

$$\mathbf{x}_i = \mathbf{x}_i^b + \mathbf{K}_i (\mathbf{y}_i - \mathbf{H}_i \mathbf{x}_i^b) \quad (3)$$

$$\mathbf{P}_i = (\mathbf{I} - \mathbf{K}_i \mathbf{H}_i) \mathbf{P}_i^b \quad (4)$$

$$\mathbf{K}_i = \mathbf{P}_i^b \mathbf{H}_i^T [\mathbf{H}_i \mathbf{P}_i^b \mathbf{H}_i^T + \mathbf{R}_i^{-1}]^{-1} \quad (5)$$

\mathbf{H} is the measurement matrix that correlates the state and the observation vector (i.e., the final estimate and the measurement, respectively) at the time step i :

$$\mathbf{y}_i = \mathbf{H}_i \mathbf{x}_i + \varepsilon_i \quad (6)$$

In our retrieval, \mathbf{H} is the measurement matrix differing from an identity matrix only for the first 12 rows filled in with the microwave weighting functions calculated using Rosenkranz98 (Rosenkranz, 1998) and MPM87 (Liebe and Layton, 1987) radiative transfer models in the K and V band, respectively. The observation vector $\mathbf{y} = [Tb_1, Tb_2, \dots, Tb_{12}, WV_1, WV_2, \dots, WV_{10\text{km}}]^T$ is n -dimensional and consists of the twelve microwave brightness temperatures (Tb_i) observed with the MP3014 and by the Raman lidar water vapour mixing ratio profile (WV_i), up to 10 km a.g.l.

In the proposed retrieval scheme, the entire lidar profile is used: this is a disadvantage from a computational point-of-view, but allows us to avoid both further assumption related to the cloud base concept and the use of criteria for cutting the lidar profile at

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

**CIAO: the CNR-IMAA
advanced
observatory for
atmospheric research**

F. Madonna et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



a selected height level. In this way only the accuracy of the lidar profile, depending directly on the lidar signal-to-noise ratio, drives the weight of the lidar profile in the retrieval scheme and its contribution to the retrieval of the integrated water vapour guess.

In Eq. (6), ε is the measurement error vector and is constituted by the Tb errors, determined according to what is proposed in Hewison et al. (2005), and by the lidar mixing ratio errors that include the contribution of the calibration error (Whiteman et al., 2001). The corresponding covariance matrix \mathbf{R} , reported in Eq. (5) and assumed as white Gaussian noise processes with zero-mean, includes both the autocovariance matrices of microwave and Raman lidar observation errors as well as cross covariance terms, calculated at all levels on long time series of simultaneous measurements. Finally, in the update Eqs. (3), (4), (5), K is the gain of the Kalman filter.

The retrieval algorithm is initialized using an estimation of the vertical profile of water vapour mixing ratio in the whole tropospheric range up to 10 km a.g.l., typically obtained from the last available lidar profile before cloud occurrence or from a co-located radiosounding. Moreover, the filter is reinitialized as soon as a cloud-free lidar profile up to 10 km a.g.l. or a co-located radiosounding profile is available.

The algorithm can be applied to all non-precipitating conditions; in presence of low clouds (about 1 km a.g.l.) the algorithm progressively reduces to a passive retrieval. The tests relative to the algorithm performances have shown that the profiles provided by the integration scheme are independent on the initialization profile in less than 1.5 h. The algorithm has been applied to long time series of measurements (> 3 h) selected from the database collected from February 2004 to March 2006, the most interesting cases of which are related to the presence of clouds or daytime measurements. The performances of the integration approach are dependent on the cloud base height, for cloudy conditions, and on the lidar signal-to-noise ratio, for daytime measurements. A statistical analysis relative to all the investigated case studies shows a root mean square (r.m.s.) deviation between the water vapour mixing ratio profiles obtained from radiosoundings and those retrieved from lidar lower than 0.2 g/kg (0.25 g/m³) up to 3 km a.g.l., where the lidar profiles play a major role, lower than 0.6 g/kg (0.5 g/m³)

from 3 to 5 km a.g.l. and lower than 0.25 g/kg (0.25 g/m^3) above. These results can be compared with the typical performances of the neural network retrieval applied to the microwave *Tbs* (Ware et al., 2003). The root mean square (r.m.s.) deviation of the radiometer humidity profiles is within $0.8\text{--}1.2 \text{ g/m}^3$ below 3 km, while it decreases with the height and is within $0.4\text{--}0.8 \text{ g/m}^3$ from 3 to 5 km a.g.l. and is lower than 0.4 g/m^3 above.

To provide a more detailed description of the performances of the algorithm, a case study relative to the measurements performed on 20 February 2004 has been selected. The case study is relative to the measurements collected from 17:00 UTC up to 00:00 UTC. The case is characterised by the presence of altostratus clouds, with a low variable cloud base height oscillating around 3.0–3.5 km a.g.l. up until 21:15 UTC and, subsequently, by the presence of fast falling cirrus clouds up to the end of the series. The lidar measurements for the selected case study, shown in Fig. 4a, have an effective resolution, as defined in Pappalardo et al. (2004b), ranging between 60 and 360 m and a temporal resolution of 10 min: lidar measurements provide a fine description of the water vapour field, penetrating also the observed altostratus clouds above their base, but the extinction due to the clouds does not allow the profiling of water vapour, neither within the cloud nor above.

The integration of the lidar information with the microwave *Tbs* in single retrieval scheme is able to provide an estimation of the water vapour mixing ratio profile up to 10 km above the station and, therefore, to estimate the cloud structure up to its top (Fig. 4b). Though the resolution of these water vapour profiles is coarser than the lidar vertical resolution, the Kalman algorithm provides an operational product that overrides possible limitations in the Raman lidar measurements and provides reliable estimation of the tropospheric water vapour. The comparison with the time series of Fig. 4a shows a slight degradation of the water vapour profile resolution in the PBL with respect to the original lidar measurements. However, this can be compensated for performing a final merging between the filter estimation and the original water vapour lidar profile.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

well fits the increase of the water vapour content above 6 km. Improvements in the error and in the vertical resolution of the retrieved profiles with respect to the microwave neural retrieval are also obtained.

5 Summary and outlook

CIAO represents a well-established ground-based remote-sensing observatory for the study of weather and climate. The observatory consists of a combination of advanced systems able to provide high quality long-term observations of aerosol and cloud properties. Since 2000, systematic observations of aerosol, water vapour and clouds have been collected and the acquisition of new active and passive microwave profilers has strengthened the equipment required for performing accurate aerosol and cloud observations. Currently, CIAO represents the largest ground-based remote-sensing station in the Mediterranean Basin and is one of the first atmospheric observatories in Europe. This potential has allowed CIAO to become one of the twelve backbone stations of GRUAN.

The CIAO database represents an optimal basis to study the synergy between different sensors and to use integration approaches for the long-term monitoring as well as for the study of aerosol-clouds-radiation interactions.

In this paper, two examples of the synergies and advanced integration schemes developed at CIAO are reported. In particular, we show the good performances of the calibration of water vapour Raman lidar profiles obtained using the IPWV retrieved by the microwave profiler as reference measurement. These performances are comparable with those obtained using the radiosounding calibration, with a variability of the calibration constant that is lower than 7% and a difference between the two calibration methods lower than 4%. We also describe a novel integration approach, based on the use of the Kalman filtering, for improving the water vapour profiling in nearly all weather conditions through the integration of Raman lidar and microwave measurements. The integration retrieval, though provides a description of the water vapour

**CIAO: the CNR-IMAA
advanced
observatory for
atmospheric research**

F. Madonna et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



**CIAO: the CNR-IMAA
advanced
observatory for
atmospheric research**

F. Madonna et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



field with a coarser resolution with respect to the lidar, it is able to provide a more operational product that allows us to override possible limitations in the Raman lidar measurements, due to the presence of thick clouds or daytime solar background, and to estimate the water vapour content in the whole troposphere. The reported case study also shows that the proposed integration approach is in better agreement with the co-located radiosounding profile with respect to the neural network retrieval applied to the microwave *T_{bs}* only.

Other integration approaches for the retrieval of aerosol properties, water vapour and liquid water content are under evaluation. Studies are in progress, particularly with the main goal to enhance the knowledge of the aerosol-clouds interactions and the characterisation of cloud liquid water content through the integration of lidar, microwave and cloud-radar measurements. Moreover, the availability of MIRA-36 cloud radar gives us also the possibility to provide new parameters and, therefore, to increase the knowledge of the cloud processes as well as to investigate nucleation processes. The integration among co-located multi-wavelength Raman lidar, cloud radar and microwave profiler observations will be one of the main future strategies at CIAO for the study of these interactions.

Acknowledgements. The authors acknowledge the ESA financial support under the ESTEC contract 21487/08/NL/HE, and the ESRIN contracts 21769/08/I-OL and 22202/09/I-EC. The financial support for EARLINET by the European Commission under grant RICA 025991 is gratefully acknowledged. The authors acknowledge the support of the European Commission through GEOmon Integrated Project under the 6th Framework Programme (contract FP6 FP6 - 2005 - Global - 4 - 036677). The authors also acknowledge the financial support of the Department of the Italian Civil Protection (DPC) under the contract Intesa Operativa n. 624 di rep., 21 December 2006. Finally, The authors acknowledge the Cloudnet project (European Union contract EVK2-2000-00611) for providing the water vapour mixing ratio profiles on the DWD Lokal-Modell grid data, which was produced by the University of Reading and the Deutscher Wetterdienst (DWD).

References

- Ackermann, I. J., Hass, H., Memmesheimer, M., Ebel, A., Binkowski, F. S., and Shankar, U.: Modal aerosol dynamics model for Europe: Development and first applications, *Atmos. Environ.*, 32(17), 2981–2999, 1998.
- 5 Ansmann, A., Riebesell, M., and Weitkamp, C.: Measurement of atmospheric aerosol extinction profiles with a Raman lidar, *Opt. Lett.*, 15, 746–748, 1990.
- Behrendt, A. and Nakamura, T.: Calculation of the calibration constant of polarization lidar and its dependency on atmospheric temperature, *Opt. Exp.*, 10(16), 805–817, 2002.
- Bianco, L., Cimini, D., Marzano, F., and Ware, R.: Combining Microwave Radiometer and Wind
- 10 Profiler Radar Measurements for High-Resolution Atmospheric Humidity Profiling, *J. Atmos. Ocean. Tech.*, 22, 949–965, 2005.
- Bösenberg, J., Ansmann, A., Baldasano, J. M., Balis, D., Böckmann, C., Calpini, B., Chaikovsky, A., Flamant, P., Hagard, A., Mitev, V., Papayannis, A., Pelon, J., Resendes, D., Schneider, J., Spinelli, N., Trickl, T., Vaughan, G., Visconti, G., and Wiegner, M.: EARLINET: A European
- 15 Aerosol Research Lidar Network, in: *Advances in Laser Remote Sensing*, edited by: Dabas, A., Loth, C., and Pelon, J., ISBN 2-7302-0798-8, 155–158, 2001.
- Cadeddu, M. P., Turner, D. D., and Liljegren, J. C.: A neural network for real-time retrievals of PWV and LWP from Arctic millimeter-wave ground-based observations, *IEEE T. Geosci. Remote*, 47, 1887–1900, 2009.
- 20 Chiu, J. C., Huang, C.-H., Marshak, A., Slutsker, I., Giles, D. M., Holben, B. N., Knyazikhin, Y., and Wiscombe, W. J.: Cloud optical depth retrievals from the Aerosol Robotic Network (AERONET) cloud mode observations, *J. Geophys. Res.*, 115, D14202, doi:10.1029/2009JD013121, 2010.
- Cornacchia, C., Amodeo, A., Mona, L., Pandolfi, M., Pappalardo, G., and Cuomo, V.: The IMAA Raman lidar system for water vapour measurements, Reviewed and revised papers presented at the 22nd International Laser Radar Conference (ILRC22), Matera, Italy, ESA SP-561, 107–110, 2004.
- 25 Di Girolamo, P., Gagliardi, R. V., Pappalardo, G., Spinelli, N., Velotta, R., and Berardi, V.: Two wavelength lidar analysis of stratospheric aerosol size distribution, *J. Aerosol Sci.*, 26, 989–1001, 1995.
- Freudenthaler, V., Esselborn, M., Wiegner, M., Heese, B., Tesche, M., Ansmann, A., Mueller, D., Althausen, D., Wirth, M., Fix, A., Ehret, G., Knippertz, P., Toledano, C., Gasteiger, J.,

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



**CIAO: the CNR-IMAA
advanced
observatory for
atmospheric research**

F. Madonna et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Garhammer, M., and Seefeldner, M.: Depolarization ratio profiling at several wavelengths in pure Saharan dust during SAMUM 2006, *Tellus B*, 61, 165–179, 2009.

Freudenthaler, V., Gross, S., Engelmann, R., Mattis, I., Wandinger, U., Pappalardo, G., Amodeo, A., Giunta, A., D'Amico, G., Chaikovskiy, A., Osipenko, F., Slesar, A., Nicolae, D., Belegante, L., Talianu, C., Serikov, I., Linne, H., Jansen, F., Wilson, K., de Graaf, M., Apituley, A., Trickl, T., Giehl, H., and Adam, M.: EARLI09 –Direct intercomparison of eleven EARLINET lidar, 25th International Laser Radar Conference (ILRC), St. Petersburg, Russia, S7O–05, pag. 61, available at: <http://ilrc25.iao.ru/conference/program>, 2010.

GCOS-107 report: Systematic Observation Requirements for Satellite-based Products for Climate – Supplemental details to the satellite-based component of the Implementation Plan for the Global Observing System for Climate in Support of the UNFCCC, September, 2006.

Han, Y., Westwater, E. R., and Ferrare, R. A.: Applications of Kalman Filtering to Derive Water Vapor Profiles from Raman Lidar and Microwave Radiometers, *J. Atmos. Oceanic Technol.*, 14, 480–487, 1997.

Hewison, T., Cimini, D., Martin, L., Gaffard, C., and Nash, J.: Validating atmospheric absorption models in clear air using ground-based microwave radiometers, *Meteorol. Z.*, 15, 27–36, 2006.

Holben, B. N., Tanre, D., Smirnov, A., Eck, T. F., Slutsker, I., Abuhassan, N., Newcomb, W. W., Schafer, J., Chatenet, B., Lavenue, F., Kaufman, Y. J., Vande Castle, J., Setzer, A., Markham, B., Clark, D., Frouin, R., Halthore, R., Karnieli, A., O'Neill, N. T., Pietras, C., Pinker, R. T., Voss, K., and Zibordi, G.: An emerging ground-based aerosol climatology: Aerosol Optical Depth from AERONET, *J. Geophys. Res.*, 106, 12067–12097, 2001.

Illingworth, A. J., Hogan, R. J., O'Connor, E. J., Bouniol, D., Brooks, M. E., Delanoe, J., Donovan, D. P., Gaussiat, N., Goddard, J. W. F., Haefelin, M., Klein Baltink, H., Krasnov, O. A., Pelon, J., Piriou, J. M., and van Zadelhoff, G. J.: Cloudnet – continuous evaluation of cloud profiles in seven operational models using ground-based observations, *B. Am. Meteor. Soc.*, 88(6), 883–898, 2007.

Intergovernmental Panel on Climate Change (IPCC): Climate Change 2007: The Scientific Basis, IPCC final report, 2007.

Kalman, R. E.: A new approach to linear filtering and prediction problems, *Journal of Basic Engineering*, Transactions ASME Ser. D, 82, 35–45, 1960.

Leiterer, U., Dier, H., and Naebert, T.: Improvements in radiosonde humidity profiles using RS80/RS90 radiosondes of Vaisala, *Contrib. Atmos. Phys.*, 70, 319–336, 1997.

CIAO: the CNR-IMAA advanced observatory for atmospheric research

F. Madonna et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Liebe, H. J. and Layton, D. H.: Millimetre-Wave Properties Of The Atmosphere: Laboratory Studies And Propagation Modeling, NTIA-Report 87–224, Natl. Telecommun. And Inf. Admin, Boulder, CO, 1987.

Lilly, D. K., Waco, D., and Aldefang, S.: Stratospheric mixing estimated from high altitude turbulence measurements, *J. Appl. Meteorol.*, 13, 488–493, 1974.

Löhnert, U., Turner, D., and Crewell, S.: Ground-Based Temperature and Humidity Profiling Using Spectral Infrared and Microwave Observations, Part I: Simulated Retrieval Performance in Clear-Sky Conditions, *J. Appl. Meteorol. Clim.*, 48, 1017–1032, 2009.

Madonna, F., Gueldner, J., D'Amico, G., Engelbart, D. A. M., and Pappalardo, G.: Intercomparison of two microwave profilers during launch-2005, 7th International Symposium on Tropospheric Profiling (ISTP), Boulder, CO, 11–17 June, 2006.

Matthias, V., Balis, D., Bösenberg, J., Eixmann, R., Iarlori, M., Komguem, L., Mattis, I., Papayannis, A., Pappalardo, G., Perrone, M. R., and Wang, X.: Vertical aerosol distribution over Europe: Statistical analysis of Raman lidar data from 10 European Aerosol Research Lidar Network (EARLINET) stations, *J. Geophys. Res.-Atmos.*, 109, D18201, doi:10.1029/2004JD004638, 2004.

Mona, L., Pappalardo, G., Amodeo, A., D'Amico, G., Madonna, F., Boselli, A., Giunta, A., Russo, F., and Cuomo, V.: One year of CNR-IMAA multi-wavelength Raman lidar measurements in correspondence of CALIPSO overpass: Level 1 products comparison, *Atmos. Chem. Phys.*, 9, 7213–7228, doi:10.5194/acpd-9-8429-2009, 2009.

Mona, L., Cornacchia, C., D'Amico, G., Di Girolamo, P., Pappalardo, G., Pisani, G., Summa, D., Wang, X., and Cuomo, V.: Characterization of the variability of the humidity and cloud fields as observed from a cluster of ground-based lidar systems, *Q. J. Roy. Meteorol. Soc.*, 133(S3), 257–271, 2007.

Mona, L., Pappalardo, G., Amodeo, A., D'Amico, G., Madonna, F., Boselli, A., Giunta, A., Russo, F., and Cuomo, V.: One year of CNR-IMAA multi-wavelength Raman lidar measurements in coincidence with CALIPSO overpasses: Level 1 products comparison, *Atmos. Chem. Phys.*, 9, 7213–7228, doi:10.5194/acp-9-7213-2009, 2009.

Müller, D., Wandinger, U., Althausen, D., and Fiebig, M.: Comprehensive particle characterization from three-wavelength Raman-lidar observations: case study, *Appl. Optics*, 40(27), 4863–4869, 2001.

Müller, D., Tesche, M., Eichler, H., Engelmann, R., Althausen, D., Ansmann, A., Cheng, Y. F., Zheng, Y. H., and Hu, M.: Strong particle light-absorption over the Pearl River Delta

(South China) and Beijing (North China) determined from combined Raman lidar and Sun photometer observations, *Geophys. Res. Lett.*, 33, L20811, doi:10.1029/2006GL027196, 2006.

- Müller, D., Heinold, B., Tesche, M., Tegen, I., Althausen, D., Amiridis, V., Amodeo, A., Ansmann, A., Arboledas, L., Balis, D., Comeron, A., D'Amico, G., Gerasopoulos, E., Freudenthaler, V., Giannakaki, E., Heese, B., Iarlori, M., Mamouri, R. E., Mona, L., Papayannis, A., Pappalardo, G., Perrone, R. M., Pisani, G., Rizi, V., Sicard, M., Spinelli, N., and Tafuro, A.: EARLINET Observations of the 14–22 May Long-Range Dust Transport Event During SAMUM 2006: Validation of Results From Dust Transport Modelling, *Tellus B*, 61, 325–339, 2009.
- Pappalardo, G., Amodeo, A., Mona, L., Pandolfi, M., Pergola, N., and Cuomo, V.: Raman lidar observations of aerosol emitted during the 2002 Etna eruption, *Geophys. Res. Lett.*, 31, L05120, doi:10.1029/2003GL019073, 2004a.
- Pappalardo G., Amodeo, A., Pandolfi, M., Wandinger, U., Ansmann, A., Bosenberg, J., Matthias, V., Amiridis, V., de Tomasi, F., Frioud, M., Iarlori, M., Komguem, L., Papayannis, A., Rocadenbosch, F., and Wang, X: Aerosol lidar intercomparison in the framework of EARLINET, part III, Raman lidar algorithm for aerosol extinction, backscatter and lidar ratio, *Appl. Optics*, 43(28), 5370–5385, 2004b.
- Pappalardo, G., Wandinger, U., Mona, L., Hiebsch, A., Mattis, I., Amodeo, A., Ansmann, A., Seifert, P., Linné, H., Apituley, A., Alados Arboledas, L., Balis, D., Chaikovsky, A., D'Amico, G., De Tomasi, F., Freudenthaler, V., Giannakaki, E., Giunta, A., Grigorov, I., Iarlori, M., Madonna, F., Mamouri, R.-E., Nasti, L., Papayannis, A., Pietruczuk, A., Pujadas, M., Rizi, V., Rocadenbosch, F., usso, F., Schnell, F., Spinelli, N., Wang, X., and Wiegner, M.: EARLINET correlative measurements for CALIPSO: First intercomparison results, *J. Geophys. Res.*, 115, D00H19, doi:10.1029/2009JD012147, 2010.
- Rodgers, C. D.: *Inverse Methods for Atmospheric Sounding: Theory and Practice*, World Scientific Publishing Co. Ltd., 2000.
- Rosenkranz, P. W.: Water vapor microwave continuum absorption: a comparison of measurements and models, *Radio Sci.*, 33, 919–928, 1998.
- Russchenberg, H. W. J., Bosveld, F., Swart, D., ten Brink, H., de Leeuw, G., Uijlenhoet, R., Arbesser-Rastburg, B., van der Marel, H., Ligthart, L., Boers, R., and Apituley, A.: Ground-based atmospheric remote sensing in The Netherlands; European outlook, *IEICE T. Commun.*, e88-b(6), 2252–8, doi:10.1093/ietcom/e88-b.6.2252, June, 2005.
- Sherlock, V. J., Hauchecorne, A., and Lenoble, J.: Methodology for the independent calibration

AMTD

3, 5253–5293, 2010

**CIAO: the CNR-IMAA
advanced
observatory for
atmospheric research**

F. Madonna et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

**CIAO: the CNR-IMAA
advanced
observatory for
atmospheric research**

F. Madonna et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

- of Raman backscatter water-vapor lidar systems, *Appl. Optics* 38, 5816–5837, 1999.
- Solheim, F., Godwin, J., Westwater, E., Han, Y., Keihm, S., Marsh, K., and Ware, R.: Radiometric profiling of temperature, water vapor, and cloud liquid water using various inversion methods, *Radio Sci.*, 33, 393–404, 1998.
- 5 Stokes, G. M. and Schwartz, S. E.: The Atmospheric and Radiation Measurement (ARM) Project: Programatic background and design of the cloud and atmospheric radiation testbed, *B. Am. Meteor. Soc.*, 75, 1201–1221, 1994.
- Stull, R. B.: *An Introduction to Boundary Layer Meteorology*, Kluwer Academic, 666 pp., 1998.
- Taylor, J. P., Smith, W., Cuomo, V., Larar, A., Zhou, D., Serio, C., Maestri, T., Rizzi, R., Newman, S., Antonelli, P., Mango, S., Di Girolamo, P., Esposito, F., Grieco, G., Summa, D., Restieri, R., Masiello, G., Romano, F., Pappalardo, G., Pavese, G., Mona, L., Amodeo, A., and Pisani, G.: EAQUATE – An International Experiment For Hyper-spectral Atmospheric Sounding Validation, *B. Am. Meteor. Soc.*, 2, 203–218, doi:10.1175/BAMS-89-2-203, 2008.
- 10 Turner, D. D., Lesht, B. M., Clough, S. A., Liljegren, J. C., Revercomb, H. E., and Tobin, D. C.: Dry bias and variability in Vaisala radiosondes: The ARM experience, *J. Atmos. Ocean. Tech.*, 20, 117–132, 2003.
- Wandinger, U. and Ansmann, A.: Experimental determination of the lidar overlap profile with Raman lidar, *Appl. Optics*, 41(3), 511–514, 2002.
- Ware, R., Carpenter, R., Güldner, J., Liljegren, J., Nehrkorn, T., Solheim, F., and Vandenberghe, F.: A multichannel radiometric profiler of temperature, humidity, and cloud liquid, *Radio Sci.*, 38(4), 8079, 2003.
- 20 Whiteman, D. N., Schwemmer, G., Berkoff, T., Plotkin, H., Ramos-Izquierdo, L., and Pappalardo, G.: Performance modelling of an airborne Raman water vapour lidar, *Appl. Optics*, 40(3), 375–390, 2001.
- Whiteman, D. N.: Examination of the traditional Raman lidar technique, I. Evaluating the temperature-dependent lidar equations, *Appl. Optics*, 42(15), 2571–2591, 2003a.
- Whiteman, D. N.: Examination of the traditional Raman lidar technique, II. Evaluating the ratios for water vapor and aerosols, *Appl. Optics*, 42(15), 2593–2608, 2003b.
- Whiteman, D. N., Demoz, B., Rush, K., Schwemmer, G., Gentry, B., Di Girolamo, P., Comer, J., Veselovskii, I., Evans, K., Melfi, S. H., Wang, Z., Cadirola, M., Mielke, B., Venable, D., and Van Hove, T.: Raman water vapor lidar measurements during the international H₂O project, I. Instrumentation and analysis techniques, *J. Atmos. Ocean. Tech.*, 23, 157–169, 2006.
- 30 WMO bulletin, The Global Observing System: its impacts and future, 54(4), 185–189, October,

2005.

WMO report: Plan for the implementation of the GAW Aerosol Lidar Observation Network GALION, available at: <http://www.wmo.int/pages/prog/arep/gaw/gaw-reports.html>, Hamburg, Germany, 27–29 March 2007, TD No. 1443, 52 pp., November, 2008.

AMTD

3, 5253–5293, 2010

**CIAO: the CNR-IMAA
advanced
observatory for
atmospheric research**

F. Madonna et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Table 1. List of the instruments operative at CIAO along with the corresponding lv1 and lv2 products, the retrieval algorithm currently in use for obtaining lv2 products, the corresponding quality assurance protocol and the advanced products obtained from the synergy and integration of different techniques.

Instrument	lv1 products	lv2 products	Algorithm	Quality assurance protocol	Advanced Synergetic products
PEARL (Potenza Earlinet Raman Lidar)	RCS at 355, 386, 407, 532, 532 parallel, 532 cross, 607, 1064 nm	β at 355/532/1064, 355/532, τ at 355/532, α at χ at 355/532 and at 532/1064, at δ at 532 nm	Ansmann et al., 1990 Pappalardo et al., 2004b Freudenthaler et al., 2009	EARLINET Quality assurance programme	Aerosol Microphysical properties (Mueller et al., 2009)
MUSA (Multiwavelength System for Aerosol) lidar	RCS at 355, 386, 407, 532, 532 parallel, 532 cross, 607, 1064 nm	β at 355/532/1064, α at 355/532, τ at 355/532, χ at 355/532 and at 532/1064, at δ at 532 nm	Ansmann et al., 1990 Pappalardo et al., 2004b Freudenthaler et al., 2009	EARLINET Quality assurance programme EARLINET reference mobile system	Aerosol Microphysical properties (Mueller et al., 2009)
CNR-IMAA water vapour Raman lidar	RCS at 355, 386, 407 nm	β , α , τ at 355 nm, WVMR	Raman retrieval (Mona et al., 2007)	Intercomparison within Italian NDACC stations	Water Vapour Raman lidar + microwave profiler for water vapour retrieval using Kalman filtering
MIRA-36 K-band Doppler Polarimetric raar	SNR, Z, Ze, Doppler velocity, LDR	LWC, IWC, Target classification	Cloudnet Retrieval Scheme (Illingworth et al., 2007)	Cloudnet quality assurance	Radar reflectivity + microwave temperature profile for melting layer retrieval
MP3014 Microwave Profiler	K-band and V-band 7bs	Temperature, WVMR, relative humidity and liquid water profiles, IPWV, LWP	Neural network algorithm (Solheim et al., 1998)	Intercomparison with radiosoundings and water vapour Raman lidar	
CIMEL CE-318 sun photometer	Radiances at 330, 380, 440, 500, 670, 880, 1060, 1640 nm	AOT, χ at 440/880, IPWV, Microphysical properties	AERONET automatic retrieval (aeronet.gsfc.nasa.gov)	AERONET lv2.0 quality assured data.	Multiwavelength lidar + sun photometer for the retrieval of aerosol microphysical properties (to be implemented, Mueller et al., 2009)
CT25K VAISALA ceilometer	–	Unattenuated backscattering profile, visibility cloud base height	Manufacturer retrieval scheme	Intercomparison with lidars	Microwave profiler neural retrieval + ceilometer (or lidar) cloud base height for LWP retrieval.
CHM15 Jenoptik ceilometer	RCS 1064 nm	Cloud base height, PBL, visibility, 1064 nm backscattering profile	Manufacturer retrieval scheme	Intercomparison with lidars	"
Surface radiation station	Surface downwelling Irradiances: solar direct, diffuse, global; longwave	Shortwave and longwave clear sky fluxes	–	To be implemented	–
Infrared thermometer	Tb in the 9.6–11.8 μ m region	Cloud base temperature	Manufacturer retrieval scheme	Intercomparison with lidars and ceilometers	Microwave temperature profile + Tb in 9.6–11.8 μ m band for cloud base retrieval
Automatic/Manual radiosounding systems	–	Temperature, pressure, relative humidity, wind profile up to 35 km a.g.l.	–	GRUAN protocols	–
Ozonesounding	–	Ozone mixing ratio profile up to 40 km a.g.l.	–	GRUAN protocols	–

CIAO: the CNR-IMAA advanced observatory for atmospheric research

F. Madonna et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Table 1. Continued.

Instrument	lv1 products	lv2 products	Algorithm	Quality assurance protocol	Advanced Synergetic products
MILOS surface meteorological station	–	Surface temperature, pressure, relative humidity and wind direction/velocity, rain gauge	–	GRUAN protocols	–
GPS receiver	ZTD	IPWV	–	To be implemented (End of 2010)	–

α – Extinction coefficient; β – Backscattering coefficient; δ – Depolarization ratio; τ – Optical depth; χ – Ångström coefficient; AOT – Aerosol Optical Depth; IPWV – Integrated Precipitable Water Vapour; IWC – Ice Water Content; LDR – Linear Depolarization Ratio; LWC – Liquid Water Content; LWP – Liquid Water Path; RCS – Range-Corrected Signal; SNR – Signal-to-Noise Ratio; T_b – Brightness Temperature; WVMR – Water Vapour Mixing Ratio; Z – reflectivity factor; Z_e – Equivalent reflectivity factor; ZTD – Zenith Tropospheric Delay.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



**CIAO: the CNR-IMAA
advanced
observatory for
atmospheric research**

F. Madonna et al.

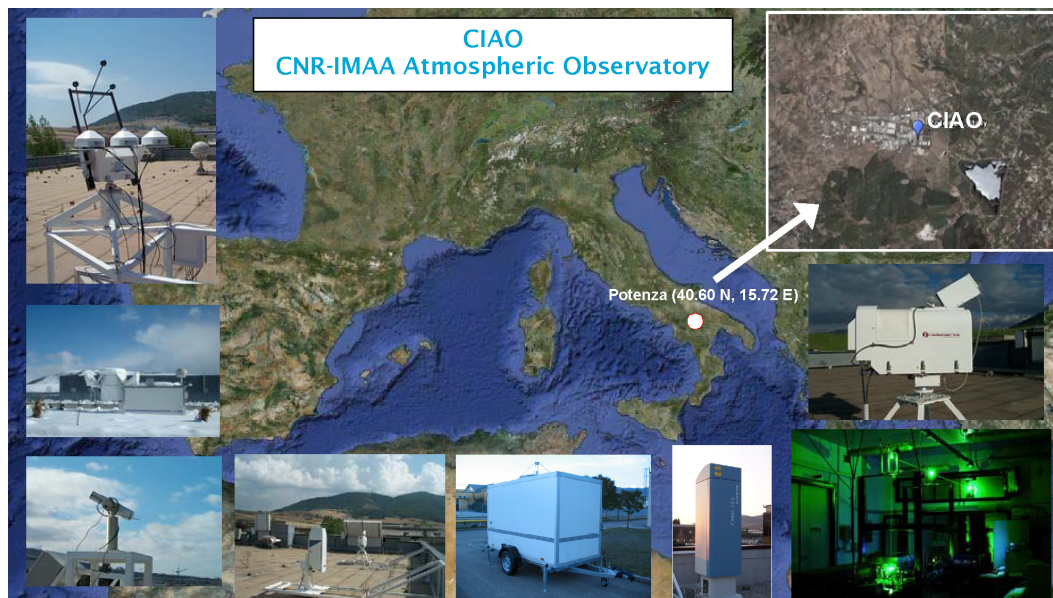


Fig. 1. Location of CIAO (CNR-IMAA Atmospheric Observatory) respect to the Mediterranean Basin and pictures of several active and passive instruments operative at the observatory.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

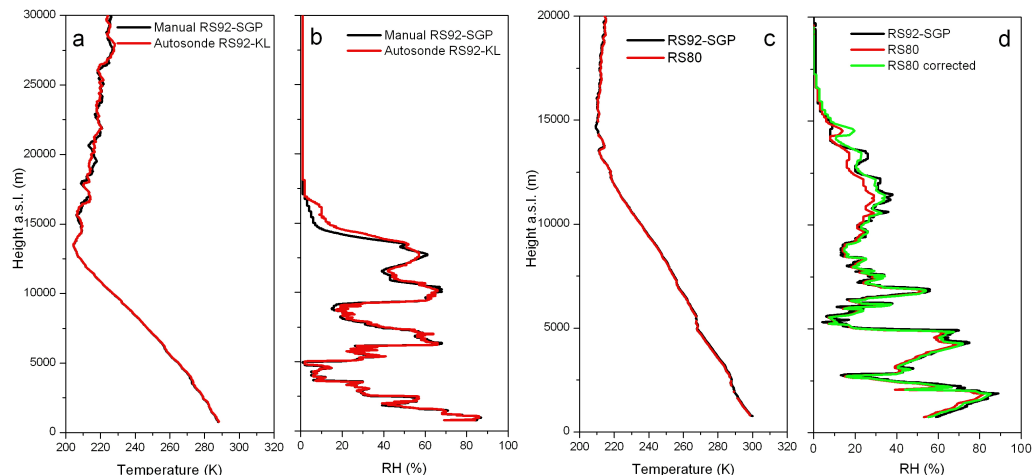


Fig. 2. Examples of dual radiosonde launches performed at CIAO: comparison of the temperature (a) and humidity (b) profiles measured using RS92-SGP and RS92-KL sondes started on 18 October 2004 at 16:13 UTC; comparison of temperature (c) and humidity (d) profiles measured using RS80 and RS92-SGP sondes started on 10 August 2004 at 16:49 UTC. The plot (d) also includes the RS80 humidity profile corrected according to Leiterer method. Both the couples of radiosoundings are co-located and isochronous.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[◀](#)
[▶](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)

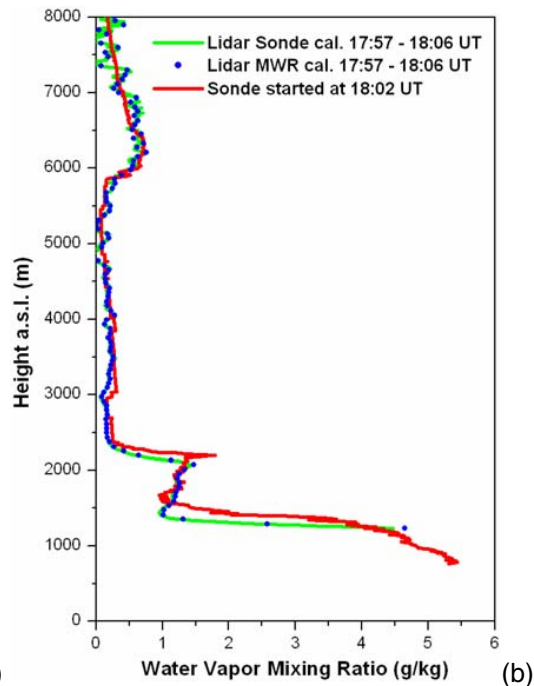
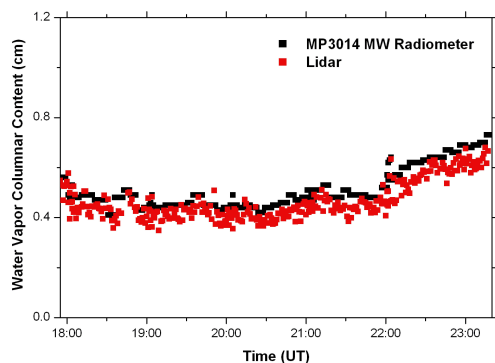


Fig. 3. (a) comparison of the IPWV retrieved by the MP3014 and obtained from Raman lidar measurements in the period from 17:50 UT to 23:20 UT on 8 September 2004. (b) Comparison between the water vapour mixing ratio profiles measured by the radiosonde started at 18:02 UT on 9 September 2004 and the lidar water vapour mixing ratio profiles calibrated using the co-located radiosounding (Sonde cal.) and the radiometric IPWV (MWR cal.). In the lower panel, the lidar water vapour mixing ratio profiles calibrated using the IPWV is reported using a regular point skipping in order to show the agreement with the profiles calibrated using the co-located radiosounding.

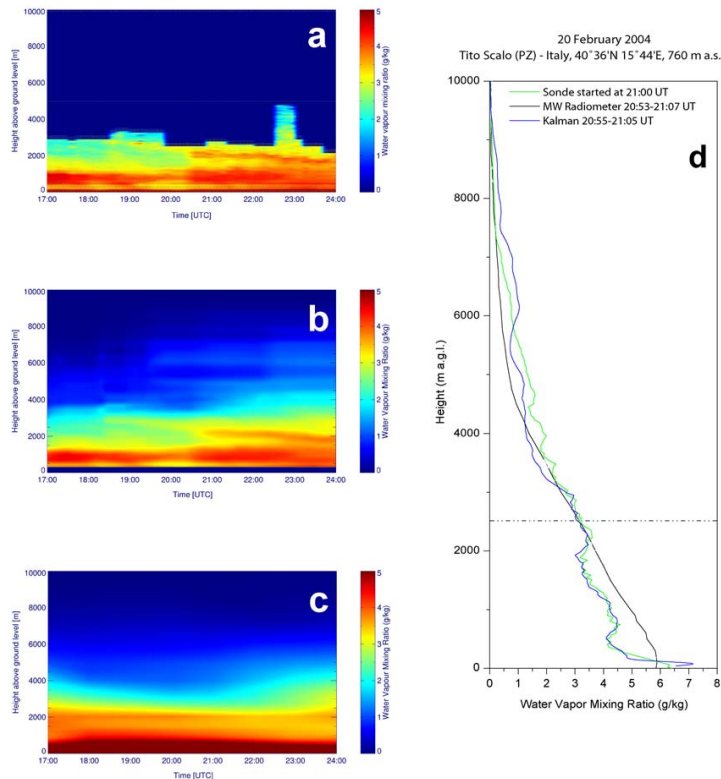


Fig. 4. **(a)** Time series of the water vapour mixing ratio profile as measured by the water vapour Raman lidar operational at the CNR-IMAA on the 20 February 2004; **(b)** time series of the water vapour mixing ratio profile obtained using the integration algorithm based on the Kalman filtering; **(c)** time series of the water vapour mixing ratio profile output by the DWD Lokal-Modell; **(d)** comparison of the water vapour mixing ratio profile obtained by a co-located radiosounding (Sonde) started at 21:00 UT, a microwave radiometer (MW Radiometer) and using the integration algorithm (Kalman).